API NUMBER:	051	24944	

Oil & Gas

Horizontal Hole

OKLAHOMA CORPORATION COMMISSION OIL & GAS CONSERVATION DIVISION P.O. BOX 52000 OKLAHOMA CITY, OK 73152-2000 (Rule 165:10-3-1)

Approval Date: 05/26/2022 Expiration Date: 11/26/2023


PERMIT TO DRILL


WELL LOCATION:	Section: 06	Township: 7N	Range: 5W	V County: C	GRADY			
SPOT LOCATION:	SE SW SE	SW F	FEET FROM QUARTER: FF	ROM SOUTH	FROM WEST			
			SECTION LINES:	205	1710			
Lease Name:	JOHNSON		We	ll No: 3H-6		ell will be 20	05 feet from nearest un	it or lease boundary.
Operator Name:	CITIZEN ENERGY III L	LC	Telep	hone: 91894946	80		OTC/OCC Nur	nber: 24120 0
·								
CITIZEN ENE	ERGY III LLC				TINA LYNN JOHNSC	N		
320 S BOSTO	ON AVE STE 900				1496 COUNTY ROAI	D 1280		
TULSA,		OK 74	103-3729		AMBER		OK 73004	
Formation (a)	(Dermit) (olid for)	listed Format	tions Only)					
Formation(s)	(Permit Valid for L			. 1				
Name	_	Code	Dep					
1 WOODFOR		319WDFD	1180	00				
Spacing Orders:	663980		Location	Exception Orders	No Exceptions		Increased Density Orders:	No Density
Pending CD Numbe	ers: 202201590		Work	ing interest owner	rs' notified: ***		Special Orders:	No Special
-						·		
Total Depth: 1	Total Depth: 16750 Ground Elevation: 1265 Surface Casing: 1500 Depth to base of Treatable Water-Bearing FM: 360					ing FM: 360		
							Deep surface casin	g has been approved
Under	Federal Jurisdiction: No	c			Approved Method for dispo	sal of Drilling I	Fluids:	
	r Supply Well Drilled: No				D. One time land application (REQUIRES PERMIT) PERMIT NO: 22-38232			RMIT NO: 22-38232
Surface	e Water used to Drill: Ye)S			H. (Other)	SEE	MEMO	
	MATION				Category of Bit	. C		
	MATION Pit System: CLOSED (Closed System Me	eans Steel Pits		Category of Pit			
Type of I	MATION Pit System: CLOSED (ud System: WATER BA		eans Steel Pits		Category of Pir Liner not required for Cate Pit Location is	gory: C		
Type of I Type of M	Pit System: CLOSED (eans Steel Pits		Liner not required for Cate	gory: C : NON HSA	Ą	
Type of I Type of Me Chlorides Max: 50	Pit System: CLOSED (ud System: WATER BA	SED			Liner not required for Cate Pit Location is	gory: C : NON HSA	Ą	
Type of I Type of Mi Chlorides Max: 50 Is depth to	Pit System: CLOSED (ud System: WATER BA 000 Average: 3000	SED ter than 10ft below			Liner not required for Cate Pit Location is	gory: C : NON HSA	4	
Type of I Type of Mi Chlorides Max: 50 Is depth to	Pit System: CLOSED (ud System: WATER BA 000 Average: 3000 top of ground water great	SED ter than 10ft below ell? N			Liner not required for Cate Pit Location is	gory: C : NON HSA	Ą	
Type of I Type of Mi Chlorides Max: 50 Is depth to Within 1 r	Pit System: CLOSED (ud System: WATER BA 000 Average: 3000 top of ground water great mile of municipal water we	SED ter than 10ft below ell? N ea? N			Liner not required for Cate Pit Location is	gory: C : NON HSA	Α	
Type of I Type of Mi Chlorides Max: 50 Is depth to Within 1 r	Pit System: CLOSED (ud System: WATER BA 000 Average: 3000 top of ground water great mile of municipal water we Wellhead Protection Are ocated in a Hydrologically	SED ter than 10ft below ell? N ea? N			Liner not required for Cate Pit Location is	gory: C : NON HSA : CHICKASH/	Α,	
Type of I Type of M Chlorides Max: 50 Is depth to Within 1 r Pit <u>is not</u> Ic PIT 2 INFOR	Pit System: CLOSED (ud System: WATER BA 000 Average: 3000 top of ground water great mile of municipal water we Wellhead Protection Are ocated in a Hydrologically	NSED ter than 10ft below ell? N ea? N r Sensitive Area.	v base of pit? Y		Liner not required for Cate Pit Location is Pit Location Formation	gory: C : NON HSA : CHICKASH4	Ą	
Type of I Type of Mi Chlorides Max: 50 Is depth to Within 1 r Pit <u>is not</u> Ic PIT 2 INFORI Type of I	Pit System: CLOSED (ud System: WATER BA 000 Average: 3000 top of ground water great mile of municipal water we Wellhead Protection Are ocated in a Hydrologically MATION	ASED ter than 10ft below ell? N ea? N ' Sensitive Area.	v base of pit? Y		Liner not required for Cate Pit Location is Pit Location Formation Category of Pir	gory: C : NON HSA : CHICKASH/ t: C gory: C	A	
Type of I Type of M Chlorides Max: 50 Is depth to Within 1 r Pit <u>is not</u> Ic PIT 2 INFOR Type of M Chlorides Max: 30	Pit System: CLOSED (ud System: WATER BA 000 Average: 3000 top of ground water great mile of municipal water we Wellhead Protection Are ocated in a Hydrologically MATION Pit System: CLOSED (ud System: OIL BASED 00000 Average: 200000	ASED ter than 10ft below ell? N ea? N r Sensitive Area.	v base of pit? Y eans Steel Pits		Liner not required for Cate Pit Location is Pit Location Formation Category of Pit Liner not required for Cate	gory: C : NON HSA : CHICKASH/ t: C gory: C : NON HSA		
Type of I Type of M Chlorides Max: 50 Is depth to Within 1 r Pit <u>is not</u> lo PIT 2 INFORI Type of M Chlorides Max: 30 Is depth to	Pit System: CLOSED (ud System: WATER BA 000 Average: 3000 top of ground water great mile of municipal water we Wellhead Protection Are ocated in a Hydrologically MATION Pit System: CLOSED (ud System: OIL BASED 00000 Average: 200000 top of ground water great	ASED ter than 10ft below ell? N ea? N ' Sensitive Area. Closed System Me) ter than 10ft below	v base of pit? Y eans Steel Pits		Liner not required for Cate Pit Location is Pit Location Formation Category of Pit Liner not required for Cate Pit Location is	gory: C : NON HSA : CHICKASH/ t: C gory: C : NON HSA		
Type of I Type of M Chlorides Max: 50 Is depth to Within 1 r Pit <u>is not</u> lo PIT 2 INFORI Type of M Chlorides Max: 30 Is depth to	Pit System: CLOSED (ud System: WATER BA 000 Average: 3000 top of ground water great mile of municipal water we Wellhead Protection Are ocated in a Hydrologically MATION Pit System: CLOSED (ud System: OIL BASED 00000 Average: 200000 top of ground water great mile of municipal water we	ASED ter than 10ft below ell? N ea? N r Sensitive Area. Closed System Me c) ter than 10ft below ell? N	v base of pit? Y eans Steel Pits		Liner not required for Cate Pit Location is Pit Location Formation Category of Pit Liner not required for Cate Pit Location is	gory: C : NON HSA : CHICKASH/ t: C gory: C : NON HSA		
Type of I Type of Mi Chlorides Max: 50 Is depth to Within 1 r Pit <u>is not</u> Ic Pit <u>is not</u> Ic PIT 2 INFORI Type of Mi Chlorides Max: 30 Is depth to Within 1 r	Pit System: CLOSED (ud System: WATER BA 000 Average: 3000 top of ground water great mile of municipal water we Wellhead Protection Are ocated in a Hydrologically MATION Pit System: CLOSED (ud System: OIL BASED 00000 Average: 200000 top of ground water great	ter than 10ft below ell? N ea? N c Sensitive Area. Closed System Me c) ter than 10ft below ell? N ea? N	v base of pit? Y eans Steel Pits		Liner not required for Cate Pit Location is Pit Location Formation Category of Pit Liner not required for Cate Pit Location is	gory: C : NON HSA : CHICKASH/ t: C gory: C : NON HSA		


This permit does not address the right of entry or settlement of surface damages. The duration of this permit is 18 MONTHS, except as otherwise provided by Rule 165: 10-3-1. Rule 165: 10-3-4 (c) (7) (e) - The Operator shall give 24 Hours notice by telephone to the appropriate District Office of the Conservation Division as to when Surface Casing will be run.

7N Range: 5W	Meridian: IM	Total Length:	4939
GRADY		Measured Total Depth:	16750
N2 N2 N2	N2	True Vertical Depth:	11800
NORTH 1/4 Sect	ion Line: 165	End Point Location from	
WEST 1/4 Sect	ion Line: 2640	Lease, Unit, or Property Line:	165
	GRADY N2 N2 N2 NORTH 1/4 Sect	GRADY N2 N2 N2 N2 NORTH 1/4 Section Line: 165	GRADY Measured Total Depth: N2 N2 N2 NORTH 1/4 Section Line: 165 End Point Location from

NOTES:	
Category	Description
DEEP SURFACE CASING	[5/23/2022 - GC2] - APPROVED; NOTIFY OCC FIELD INSPECTOR IMMEDIATELY OF ANY LOSS OF CIRCULATION OR FAILURE TO CIRCULATE CEMENT TO SURFACE ON ANY CONDUCTOR OR SURFACE CASING
HYDRAULIC FRACTURING	[5/23/2022 - GC2] - OCC 165:10-3-10 REQUIRES:
	1) NOTICE SHALL BE GIVEN AT LEAST 5 BUSINESS DAYS PRIOR TO COMMENCEMENT OF HYDRAULIC FRACTURING OPERATIONS ON A HORIZONTAL WELL TO OPERATORS PRODUCING WELLS WITHIN 1 MILE OF THE COMPLETION INTERVAL OF THE SUBJECT WELL. THE NOTICE TO SUCH OPERATORS SHALL CONTAIN THE INFORMATION IN FORM 6000NOO. IF THE HYDRAULIC FRACTURING OPERATIONS SCHEDULE CHANGES AFTER NOTICE HAS BEEN PROVIDED, RESULTING IN A DELAY OF OPERATIONS OF MORE THAN 5 DAYS FROM THE INITIAL NOTICE, NEW NOTICE IS REQUIRED TO BE GIVEN;
	2) NOTICE WILL BE GIVEN TO THE OCC CENTRAL OFFICE AND LOCAL DISTRICT OFFICES AT LEAST 48 HOURS PRIOR TO COMMENCEMENT OF HYDRAULIC FRACTURING OPERATIONS. FORM 6000NHF SHALL BE USED AND IS FOUND AT THIS LINK: OCCEWEB.COM/OG/OGFORMS.HTML; AND,
	3) THE CHEMICAL DISCLOSURE OF HYDRAULIC FRACTURING INGREDIENTS FOR ALL WELLS IS TO BE REPORTED TO FRACFOCUS WITHIN 60 DAYS AFTER THE CONCLUSION OF HYDRAULIC FRACTURING OPERATIONS, FOUND AT FRACFOCUS.ORG
МЕМО	[5/23/2022 - GC2] - CLOSED SYSTEM=STEEL PITS PER OPERATOR REQUEST, OBM RETURNED TO VENDOR, CUTTINGS PERMITTED PER DISTRICT
PENDING CD - 202201590	[5/26/2022 - G56] - 6-7N-5W X663980 WDFD 3 WELLS CITIZEN ENERGY III, LLC REC 5/23/2022 (MOORE)
SPACING - 663980	[5/26/2022 - G56] - (640)(HOR) 6-7N-5W VAC OTHERS EXT 621966 WDFD, OTHERS COMPL INT NCT 165' FNL & FSL, NCT 330' FEL & FWL
WATERSHED STRUCTURE	[5/23/2022 - GC2] - WELL WITHIN 1/2 MILE OF AN OKLAHOMA CONSERVATION COMMISSION WATERSHED STRUCTURE. CONTACT THE LOCAL CONSERVATION DISTRICT OFFICE AT (405) 224-0523 PRIOR TO DRILLING

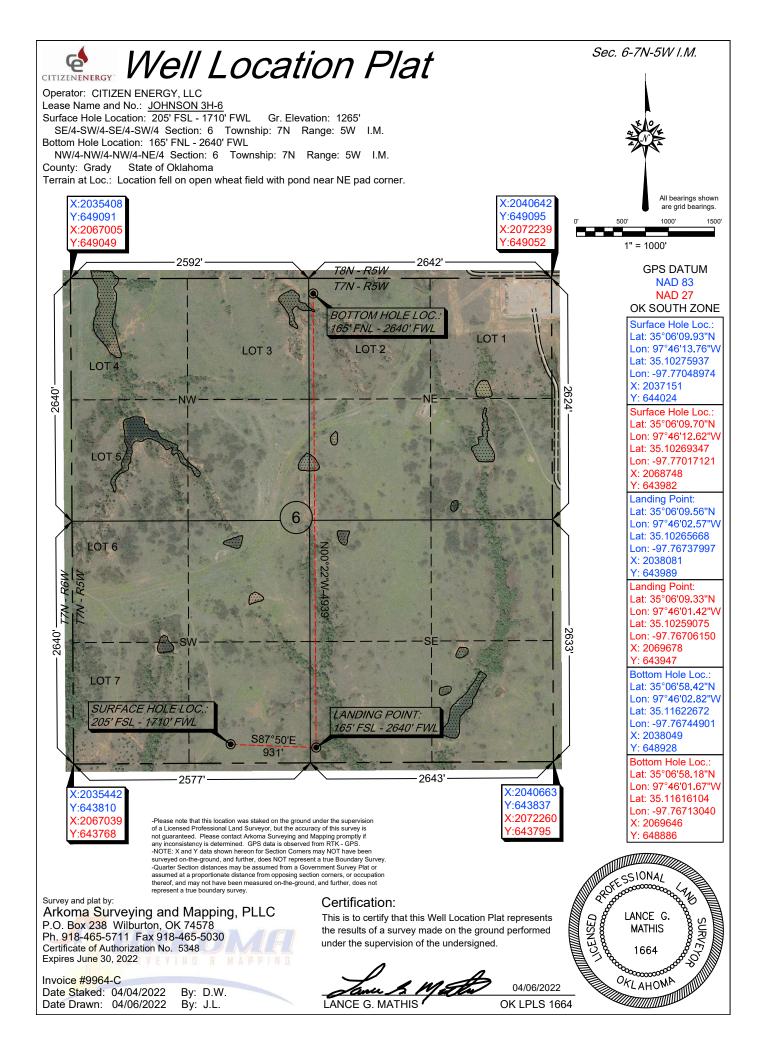

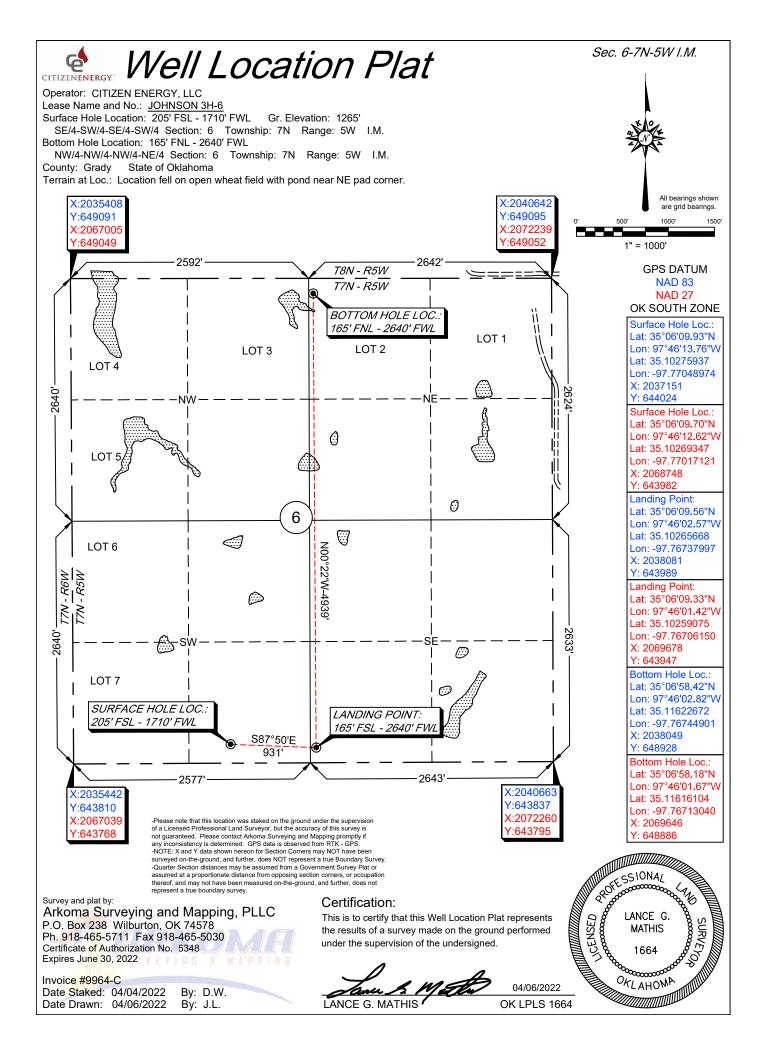

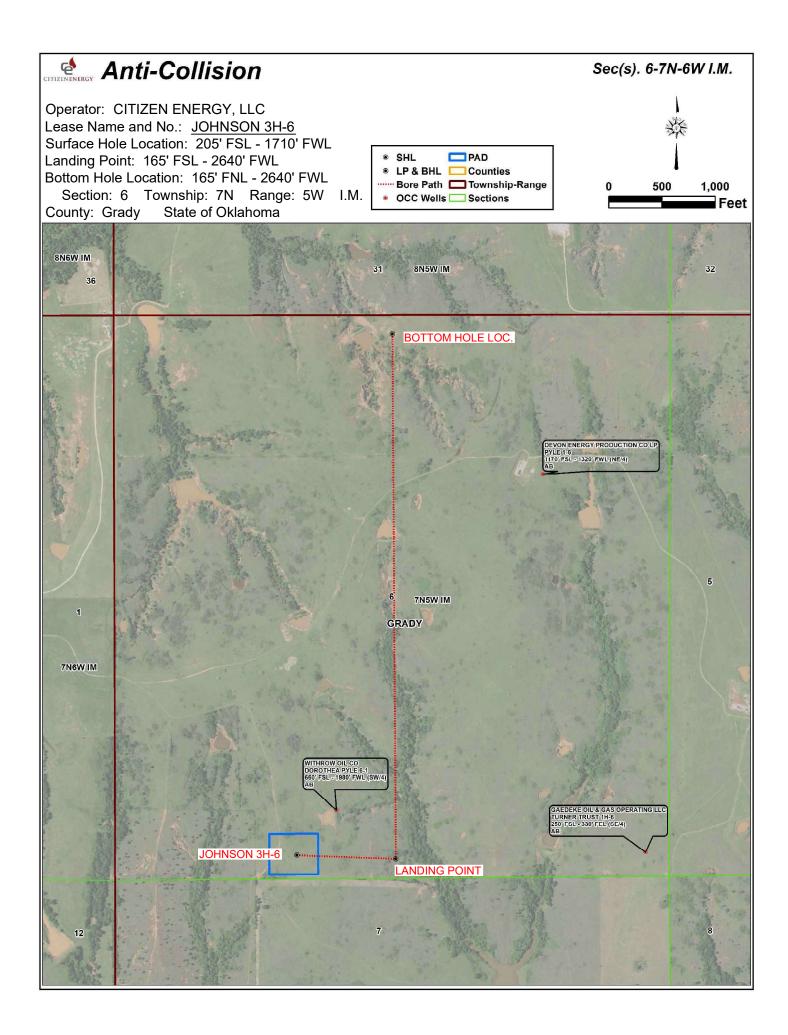




Topographic Vicinity Map

Operator: CITIZEN ENERGY, LLC Lease Name and No.: JOHNSON 3H-6 Surface Hole Location: 205' FSL - 1710' FWL Landing Point: 165' FSL - 2640' FWL Bottom Hole Location: 165' FNL - 2640' FWL Section: 6 Township: 7N Range: 5W I.M. County: Grady State of Oklahoma



Scale 1" = 2000' Contour Interval: 10'

Ground Elevation at Surface Hole Location: 1265'

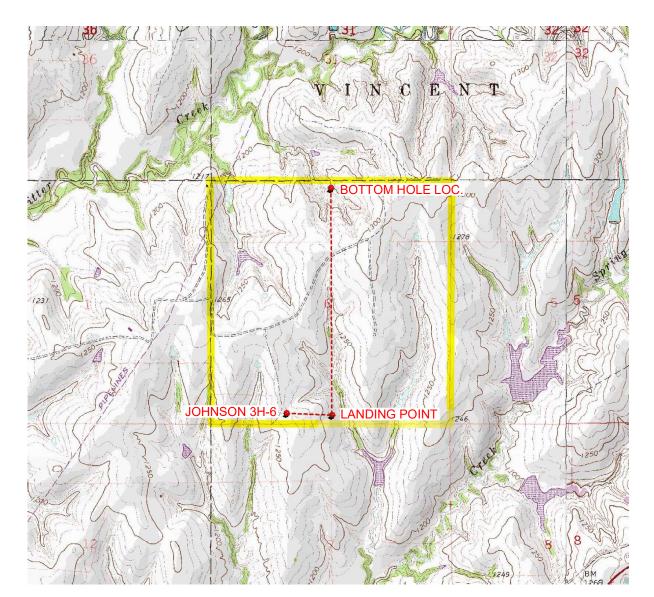

Provided by:

Arkoma Surveying and Mapping, PLLC P.O. Box 238 Wilburton, OK 74578 Ph. 918-465-5711 Fax 918-465-5030

Certificate of Authorization No. 5348 Expires June 30, 2022

Date Staked: 04/04/2022

The purpose of this map is to verify the location and elevation as staked on the ground and to show the surrounding Topographic features. The footage shown hereon is only as SCALED onto a U.S.G.S. Topographic Map.

Please note that this location was staked carefully on the ground under the supervision of a Licensed Professional Land Surveyor, but the accuracy of this survey is not guaranteed.

Please contact Arkoma Surveying and Mapping promptly if any inconsistency is determined.

